

HUMI&TEMP TRANSMITTER

溫、濕度傳訊器 HT-300



特點 FEATURES :

- (1) 反應速度快、精度穩定(Fast response、stable and accurate)
- (2) 標準尺寸、易於安裝(Compact size allows easy mounting)
- (3) 長期使用、線性佳(Excellent long-term stability)
- (4) 磁滯效應小，穩定性良好(Low magnetic stability)
- (5) 內部微調，可供使用者自行校正(On-site, Two point calibration.(Zero and Span),it makes calibration easy)

Zeta

HUMI&TEMP TRANSMITTER


溫、濕度傳訊器 HT-300

主要規格 (SPECIFICATIONS)



MEASUREMENT RANGE 測量範圍	溼度(Humidity) : 0~100%RH 溫度(Temperature) : 0~100°C (-50 ~ +150°C 單獨溫度轉換器才有)
ACCURACY 精度	±2.5%RH, ±0.3°C
OUTPUT SIGNALS 輸出信號	溫度(Temperature): 4~20mA Two wire 溼度(Humidity): 4~20mA Two wire zero and span adujstable
POWER SUPPLY 工作電壓	12~40VDC
AMBIENT TEMPERATURE 工作環境溫度	0~50°C
RESPONSE TIME 反應時間	Between 20 % and 90 % RH<2min
SESONS 感測元件	溼度(Humidity): Thin-film capacitor 溫度(Temperature): RTD pt100Ω (DIN43760)
WEIGHT 重量	200g
HOUSING 外盒材質	ABS plastic watertight enclosure (IP65)

機型代號 (ORDERING INFORMATIONS)

Model 型號	DESCRIPTIONS 功能內容
HT-301	溫度信號傳送器 TEMPERATURE TRANSMITTER
HT-302	濕度信號傳送器 HUMIDITY TRANSMITTER
HT-303	溫、濕度信號傳送器 HUMI/TEMP TRANSMITTER
SHAPE (外型) (Mounting)	W 壁掛型 Wall mount Type
	D 管路型 Duct mount Type
	S 分離型 Separated Type

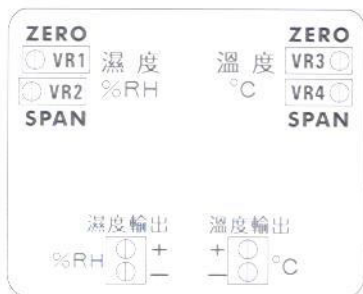

單位:mm

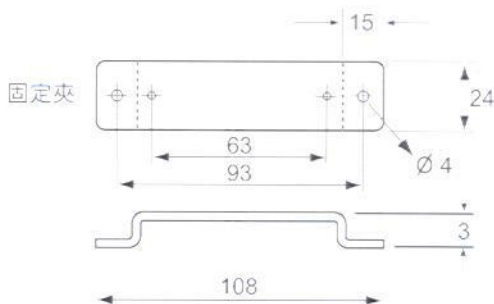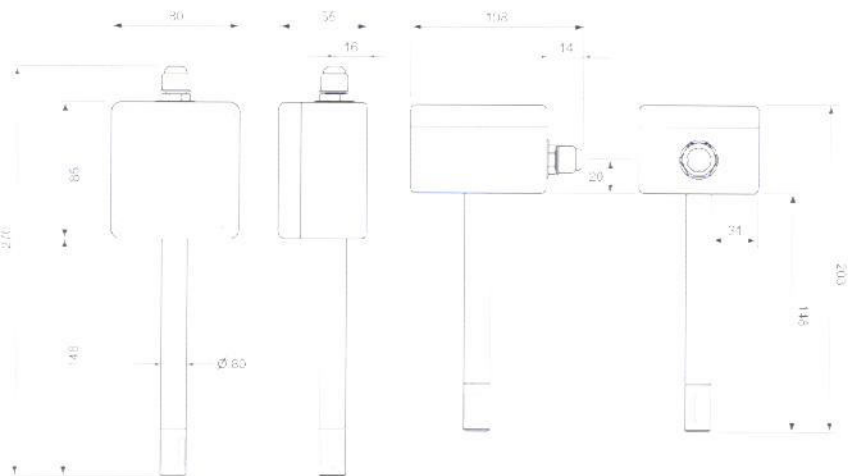

Zeta